



GLOBAL POLYMER INDUSTRIES

P.O.Box 1428; 2 Volt Street, Industrial West; OTJIWARONGO / NAMIBIA







e-mail: info@styrotex.com.na ; Tel : 067 - 303191/2

TDS: 047 / July 2020



INSULATED ROOF PANEL

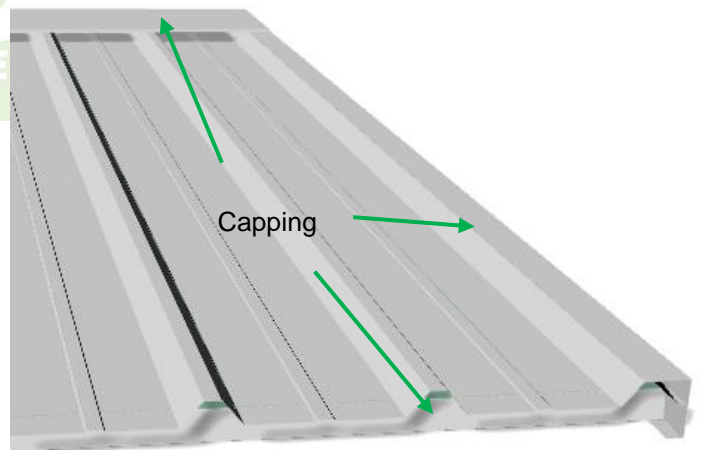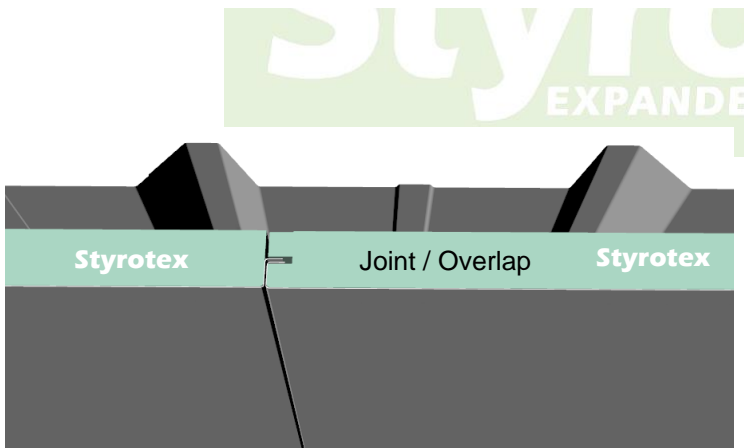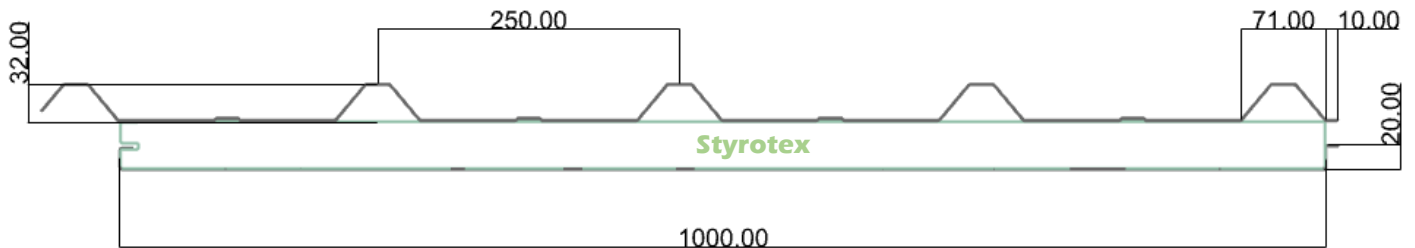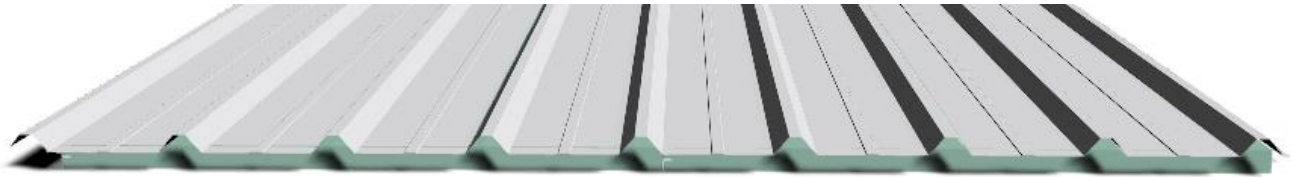

Material and Dimensions:

Top - Trapeze- AZ150/Z160/Z200, minimum 0.47mm thick, pre-painted sheet metal
 Filler - Styrotex FR EPS
 Bottom - flat AZ150/Z160/Z200, minimum 0.47mm thick, pre-painted sheet metal

Coverage - 1000mm;
 Length - as per customer specification (max. 12m);
 Thickness - 40mm, 50mm, 75mm, 100mm,



The information contained herein is provided for general purposes only and may be changed for the purpose of improving the system. By providing the information contained herein Global Polymer Industries cc makes no guaranty or warranty, and does not assume any liability with respect to the accuracy or completeness of such information, or the product results in any specific instance and hereby expressly disclaims any implied warranties of merchantability or fitness for a particular purpose, or any other warranties or representations whatsoever, expressed or implied.

